

# EFFECT OF CHEMICAL TREATMENT ON NATURAL FIBER REINFORCED POLYMER COMPOSITES

Muthu Kumaran A

Assistant Professor, Department of Mechanical Engineering, PSNA College of Engineering and Technology, Dindigul-624 622,  
Tamil Nadu, India

\*corresponding Author, E-Mail: muthu2189@gmail.com

Phone: +918838968127

**Abstract**— Composite materials play a significant role in various engineering applications for the past few decades. Now, present scenario researchers are focused their attention to find the eco friendly material for to replace the conventional/existing harmful material. The natural available material is the most suitable for the present problem but their properties are to be studied for their different applications. In this proposed study the naturally available Ridge gourd (*Luffa acutangula*) is selected as reinforcement for preparing the composite material. The mechanical properties of the composites are compared by chemically treated and untreated the reinforcement and fabricates the composite specimens by varying the wt%. This paper attempt to focus on the effect of chemical treatment on mechanical properties enhancement of natural fiber reinforced composite. The mechanical behavior of the composites has been investigated by conducting the various tests. The composite specimens are prepared as per the ASTM standard.

**Keywords**- Composite material, Ridge gourd (*Luffa acutangula*), Chemical treatment

---

## I. INTRODUCTION

The advantage of composite materials over conventional materials stem largely from their higher specific strength, stiffness and fatigue characteristics, which enables structural design to be more versatile. Composites are materials that comprise strong load carrying material (known as reinforcement) imbedded in weaker material (known as matrix). Reinforcement provides strength and rigidity, helping to support structural load. The matrix or binder (organic or inorganic) maintains the position and orientation of the reinforcement.

The natural fiber as reinforcement have attracted the researches because of their biodegradable, cheap, availability, and have low density they are light when compared to all synthetic fibers. The synthetic fiber posses high stiffness, strength to weight ratio as compared to conventional materials. The major disadvantages of natural fiber composites are poor adhesion between reinforcement and matrix and the high moisture absorption. To overcome these disadvantages chemical treatment has been done to increase the adhesion and improve the surface properties.

The processing of natural fiber reinforced polymer composites have been increased in recent years by increasing strength through chemical modification by eliminating foreign materials include wax, lignin, hemicellulose content in the fiber. Different chemical treatments can be done in natural fiber to modify their properties. Some treatments used to promote the adhesion by chemically coupling the adhesive to the material such as alkaline, silene and acrylic acid [1]. Srinivasa C. V et al [ 2 ] examined the areca fibers from the areca husk were alkali treated with potassium hydroxide (KOH) to obtain better interfacial bonding between fiber and matrix. The treated composite specimen posses superior mechanical properties when compared to

untreated areca fibers. The chemical treatment in the coconut sheath fiber, the cellulose content was increased, but hemicelluloses, lignin and other materials content was decreased compared to untreated (raw) coconut sheath fiber [3]. O.M.L. Asumani et al [4] presented the article on the effect of alkali treatment combined with three-aminopropyltriethoxysilane treatment of kenaf fibres improves the tensile and flexural properties of kenaf fibre reinforced polypropylene composites. Alfa fiber act as one of the prominent natural fibers the alkali treatment of fibers Alfa improves the quality of the fiber/matrix interface. Alfa fibers are comparable to other natural fibers used as reinforcement in polymer matrices. They are completely suitable for use as reinforcement in composites[5]. M.M. Kabir et al. [6] examined the various different surface treatments applied to natural fibres for advanced composites applications, the chemical treatment is an essential processing parameter to reduce hydrophilic nature of the fibres and thus improves adhesion with the matrix.

The effect of chemical treatment on the mechanical properties of sisal fibre reinforced polyester composites was investigated KOH treatment on the sisal fiber results in greater mechanical properties [7]. The influence of chemical treatment on the flax fibers are also done and reviewed the strength properties of the untreated fiber possess lesser values to enhance adhesion[8]. The Ridge gourd (*Luffa acutangula*) have been fabricated with Epoxy resin CY-230 and HY-951 and treated with alkali treatment to get greater mechanical properties than the treated ridge gourd fiber [9]. The simultaneous effects of coupling agents on the mechanical, morphological, and water sorption properties of luffa fiber (LF)/polypropylene(PP) composites were analysed. In order to enhance the interfacial interactions between the PP matrix and the luffa fiber [10].

## II. EXPERIMENTAL WORK

### A. Matrix Material

The matrix material selected here is Epoxy 103 resin with HY951 hardener as the binder for the resin.

### B. Natural fiber:

Ridge angled gourd, or angled loofah (*Luffa acutangula*) is a cucurbitaceous vegetable originated in sub-tropical region of Asia. Ridge gourd is generally monoecious in nature with pistillate (female) flowers borne in axil of flowers and staminate (male) flowers in raceme. *Luffa acutangula* is a tropical plant belonging to the family of Cucurbitacea, with a fruit possessing netting like fibrous vascular system. The *Luffa acutangula* struts are characterized by a micro cellular architecture with continuous hollow microchannels which forms a vascular bundles and yield a multimodal hierarchical pore system. Luffa sponge is a light-weight natural material which has the potential to be used as an alternative sustainable material for various engineering applications such as packaging, acoustic and vibration isolation, and impact energy absorption.

### C. Surface Treatment :

The Alkali treatment of cellulosic fibers is also called mercerization it is the usual method to produce high quality fibers. The Alkali treatment will improve the fiber-matrix adhesion due to the removal of natural and artificial impurities present in the fiber. The alkali treatment will reduce the fiber diameter and thereby increase the aspect ratio thus the development of a rough surface topography and enhancement in aspect ratio offer better fiber-matrix interface adhesion and an increase in mechanical properties. The Alkali treatment increases the surface roughness resulting in better mechanical interlocking and the amount of cellulose exposed on the fiber surface and it increases the number of possible reaction sites and allows better fiber wetting. Surface Treatment of

the natural fibers was performed by rinsing the fibers in 10% NaOH solution for one hour and followed by washing with distilled water repeatedly. The NaOH treatment removed wax and fatty substances and changed surface topography of the fibers.

*D. Preparation Of The Specimen:*

*Mould:*

A mould made up of EN31 steel of dimension 180\*160\*3 mm is prepared. Casting of the composite materials in this mould is done by compression moulding technique.

*Specimen:*

The Epoxy resin 103 and the hardener HY-951 is mixed with a ratio of 10:1. This solution is used as Matrix and the different types of natural fibers are used as reinforcements. The types of composites manufactured are untreated single layer, double layer, triple layer and the alkali treated single layer, double layer, triple layer with different weight ratio.

### III. RESULTS AND DISCUSSION

*A. Tensile Test:*

The different tensile strength of different layers of specimens are as shown in the figure below. The figure represents the variation of tensile strength of the composites with the different weight percentage of the reinforcement. The graph has been plotted taking weight fraction of different layer fiber along the X-axis and Tensile strength (MPa) along the Y-axis. The tensile strength of specimen increases on the triple layer. The alkali treated triple layer specimen possesses higher tensile strength of 29MPa.

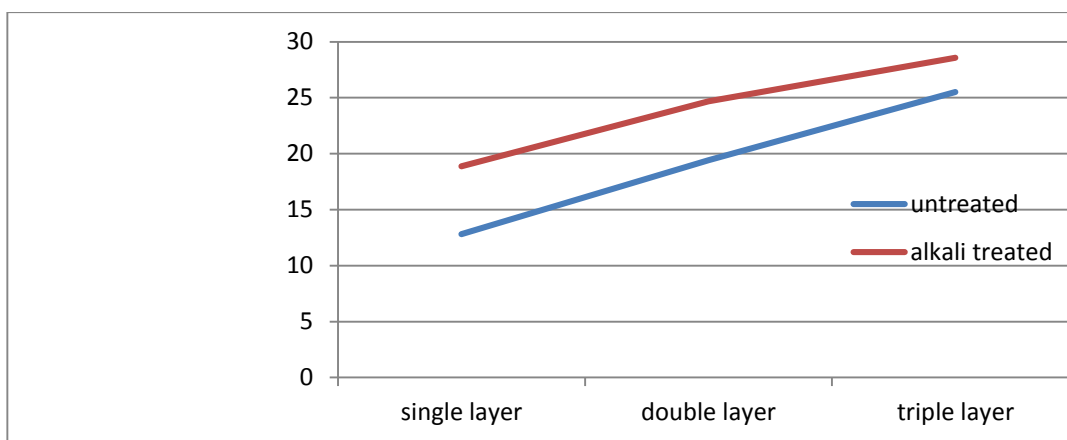


Figure 1. : Tensile test of the specimen

*B. Hardness:*

The hardness value of both the untreated and alkali treated composite specimens with different layers are as shown in the figure below. The hardness was measured on the equipment Shore durometer which is used to measure the hardness for the composite material specimens. From the graph it shows the triple layer specimen shows the greater hardness.

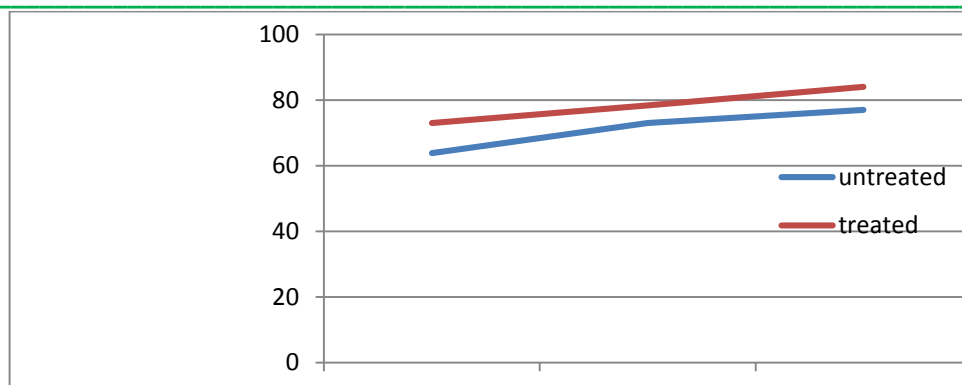


Figure 2. : Hardness test of the specimen

#### IV. CONCLUSION

In the present work the Ridge gourd (*Luffa acutangula*) / epoxy reinforced composites has been prepared by compression moulding method by using alkali treated and untreated fiber. The composite specimens are prepared with different weight percentage for single layer, double layer and triple layer for both alkali treated and untreated fiber. The specimens are prepared by ASTM standards for different mechanical testing and the tested results are tabulated. The alkali treated composite specimen shows greater mechanical properties compared to the untreated one. The alkali treated triple layer specimen possesses greater and high properties because the chemical treatment will increase the interfaces between the fiber and matrix material. From the result it is identified that specimens with chemical treated shows more strength than the untreated.

#### V. REFERENCES

- [1] Xue Li, Lope G. Tabil, Satyanarayan Panigrahi. (2007) 'Chemical treatments of natural fiber for use in natural fiber-reinforced composites: A Review' *Polymer Environment*, Vol. 15, pp. 25-33.
- [2] Srinivasa C. V., Bharath K. N. (2013) 'Effect of Alkali Treatment on Impact Behavior of Areca Fibers Reinforced Polymer Composites' *International Journal of Chemical, Nuclear, Metallurgical and Materials Engineering* Vol:7, No:4.
- [3] S.M. Suresh Kumar, D. Duraibabu, K. Subramanian. (2014) 'Studies on mechanical, thermal and dynamic mechanical properties of untreated (raw) and treated coconut sheath fiber reinforced epoxycomposites' *Materials and design*, Vol. 59, pp. 63-69.
- [4] O.M.L. Asumani, R.G. Reid, R. Paskaramoorthy. (2012) 'The effects of alkali-silane treatment on the tensile and flexural properties of short fibre non-woven kenaf reinforced polypropylene composites' *Composites*, Vol. Part A 43, pp. 1431-1440.
- [5] Mansour Rokbi, Hocine Osmani, Abdellatif Imad, Noureddine Benseddiq. (2011) 'Effect of Chemical treatment on Flexure Properties of Natural Fiber-reinforced Polyester Composite'

Procedia Engineering Vol 10.M. Young, The Technical Writer's Handbook. Mill Valley, CA: University Science, 1989.

- [6] M.M. Kabir , H. Wang, K.T. Lau, F. Cardona. (2012) 'Chemical treatments on plant-based natural fibre reinforced polymer composites: An overview ' composites , Vol part B 43, pp. 2883-2892.
- [7] Isiaka Oluwole OLADELE, Oluyemi Ojo DARAMOLA, and Solomon FASOOTO. (2014) 'Effect of chemical treatment on the mechanical properties of sisal fibre reinforced polyester composites' Leonardo Electronic Journal of Practices and Technologies, Vol. 24 , pp. 1-12.
- [8] I. Van de Weyenberg, J. Ivens, A. De Coster, B. Kino, E. Baetens , I. Verpoest. (2003) 'Influence of processing and chemical treatment of flax fibres on their composites' Composites Science and Technology, Vol 63 , pp. 1241–1246.
- [9] Girisha.C, Sanjeevamurthy, Gunti Rangasrinivas (2012). 'Tensile properties of natural fiber reinforced epoxy-hybrid composites' International Journal of Modern Engineering Research (IJMER), Vol. 2, pp. 471-474 .
- [10] H. Demir, U. Atikler, D. Balkose, F. Tihminlioglu (2006). 'The effect of fiber surface treatments on the tensile and water sorption properties of polypropylene–luffa fiber composites' Composites: Part A Vol 37 , pp.447–456.